



## AL.1.88/..

- replaceable expansion insert
- non-PVC
- stable aluminum supports

### FEATURES

expansion insert can be replaced anytime, abrasion-, weather- and temperature-resistant (-40°C to +120°C), perforated bearing legs guarantee the best connection to the substrate/covering

### APPLICATIONS

residential, office and administration buildings

### MATERIAL

aluminium, EPDM expansion insert

### COVERING TYPES


screed, natural and stone slabs

### FORMED PARTS

corner piece, T-piece, cross piece

### NOTES

For mastic asphalt, please ask for technical advice.

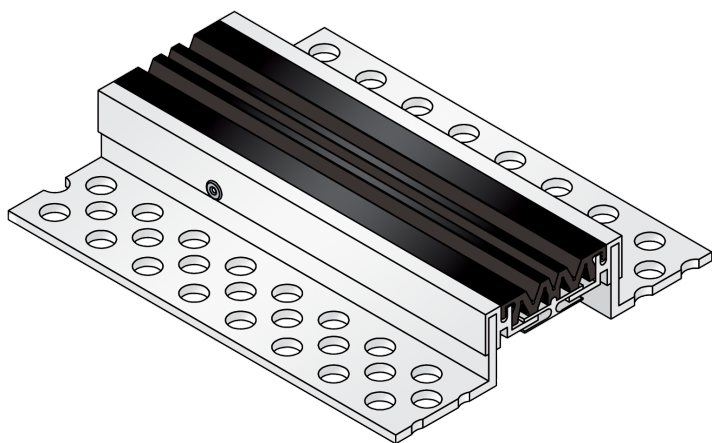


### TECHNICAL DATA

Movement horizontal:	26 mm (±13 mm)
Movement vertical:	16 mm (±8 mm)
Visible width:	88 mm
Maximal joint width:	65 mm
Load rating:	wheel load 700 kg up to Ø 150 mm, B = 100 mm
Supply length:	3 mtr
Color of expansion insert:	schwarz oder grau

### DESIGNS

ARTICLE NO.	PROFILE HEIGHT (h)	RECESS (BxT)
AL.1.88/33	33 mm	260 x 43 mm
AL.1.88/43	43 mm	260 x 53 mm
AL.1.88/63	63 mm	260 x 73 mm
AL.1.88/83	83 mm	260 x 93 mm
AL.1.88/103	103 mm	260 x 113 mm

Special heights on request.

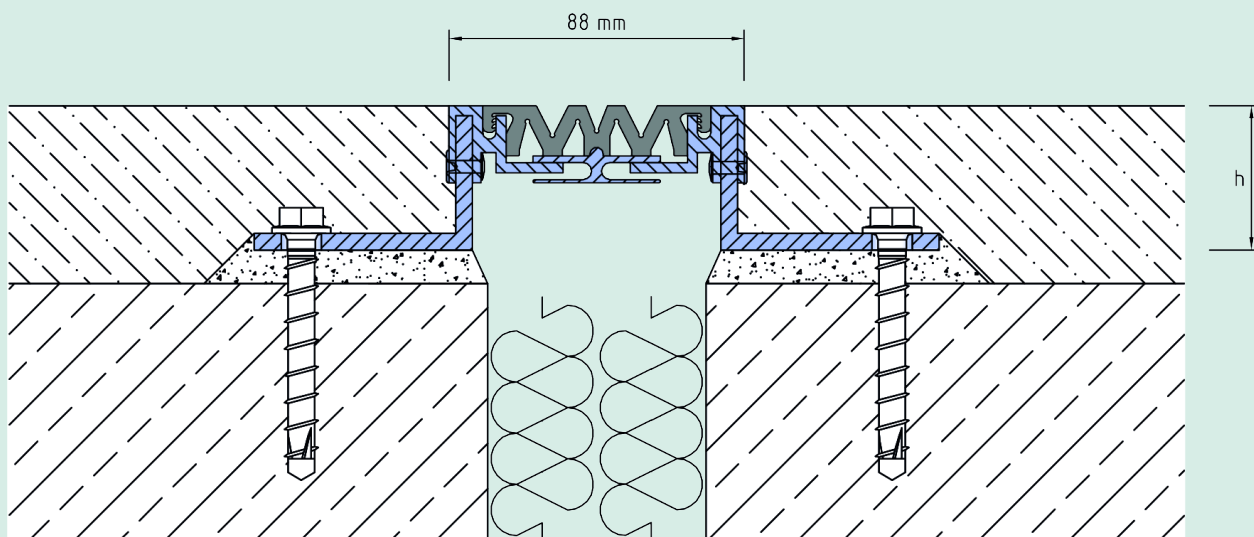

AL.1.88

Subject to technical change without notice.