



AL.1.88/..

- replaceable flexible insert
- Non-PVC
- stable aluminium joists

FEATURES

expansion insert can be replaced anytime, abrasion, weather and temperature resistant (-40°C bis +120°C), punched bearing legs guarantee best connection to the subgrade/covering.

APPLICATIONS

residential, office and administration buildings

MATERIAL

aluminium, synthetic rubber flexible insert (EPDM)

COVERING TYPES


screed, natural and stone slabs

FORMED PARTS

corner piece, T piece, cross piece

NOTES

In case of mastic asphalt, please request a technical consultation.

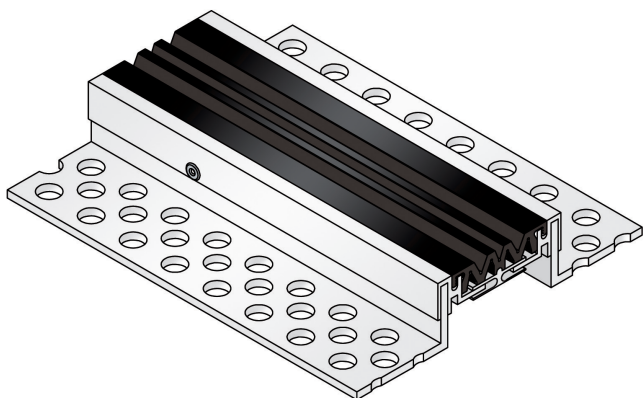


Technical data

Movement horizontal:	26 mm (±13 mm)
Movement vertical:	16 mm (±8 mm)
Visible width:	88 mm
Maximal joint width:	65 mm
Load rating:	wheel load 700 kg up to Ø 150 mm, B = 100 mm
Supply length:	3 mtr
Color of flexible insert:	black or grey

Designs

Article No.	Profile height (h)	Recess(WxD)
AL.1.88/33	33 mm	260 x 43 mm
AL.1.88/43	43 mm	260 x 53 mm
AL.1.88/63	63 mm	260 x 73 mm
AL.1.88/83	83 mm	260 x 93 mm
AL.1.88/103	103 mm	260 x 113 mm
Special heights on request.		

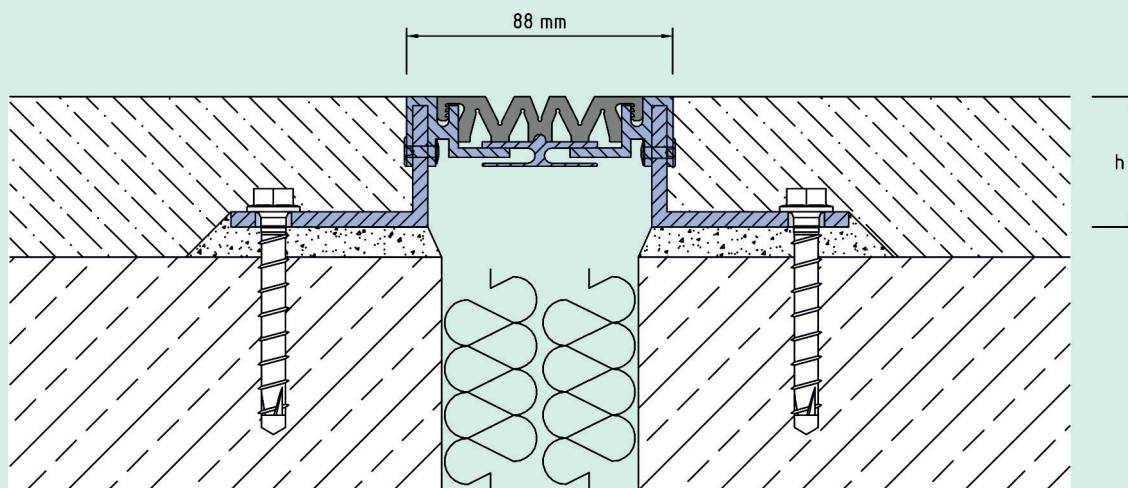

AL.1.88

Subject to technical change without notice.