




## ALK.1.120/..

- high load-bearing capacity
- with loose/fixed flange

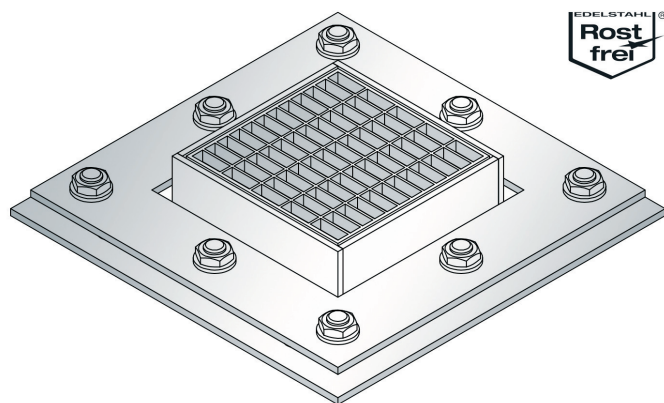

### FEATURES

resistant to heavy loads, permanently tight, corrosion-resistant, high flexibility (variable heights and widths), mesh size of the steel grating in 30X10 mm or 30x30 mm possible, grate adjustment inclusive, drain pipe DN100, length 200 mm

### APPLICATIONS

outdoor, multi-storey and underground park decks, all industrial applications, shopping centres, railway stations, airports, exhibition halls

### MATERIAL

hot-dip galvanised steel, high-grade steel V4A (on request)

### COVERING TYPES

asphalt, screed

### TRAFFICABILITY

truck (on request)

### NOTES

drainage slots are possible (on request).

For stainless steel gutters, the general cleaning and care instructions must be observed (see also [www.buprofile.de](http://www.buprofile.de) - Download section).


Our engineers and technicians can be of assistance during installation on request.

### Technical data

Material thickness fixed flange: 6 mm  
Material thickness vertical base: 5 mm  
Steel grating width: 120 mm

### Designs

Article No.	Channel height (h)	Recess(WxD)
ALK.1.120/51	51 mm	320 x 20 mm
ALK.1.120/61	61 mm	320 x 20 mm
ALK.1.120/81	81 mm	320 x 20 mm
Special heights on request.		

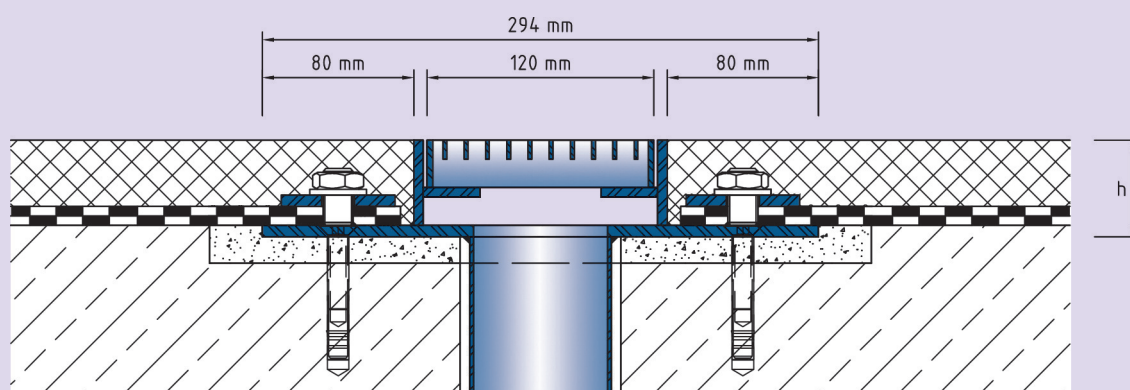

ALK.1.120

Subject to technical change without notice.