



LFK1/..

- with loose/fixed flange
- covering separation
- edge termination

FEATURES

high edge protection, professional flooring separation

APPLICATIONS

outdoor, multi-storey and underground park decks, ramp accesses, pedestrian bridges, all industrial applications, shopping centres, railway stations, airports

MATERIAL

hot-dip galvanised steel, high-grade steel V4A (on request)

COVERING TYPES

asphalt, concrete, screed

FORMED PARTS

end piece, corner piece, T piece, cross piece


NOTES

The location of the loose flange (60x6 mm) can be installed in any position depending on the requirement (horizontally or vertically inside or outside).

stud bolt M12x35 mm with lining disc and nut

loose flange, l = 1500 mm

Solid flange joints should be fully welded through and ground flat on the sealing side.

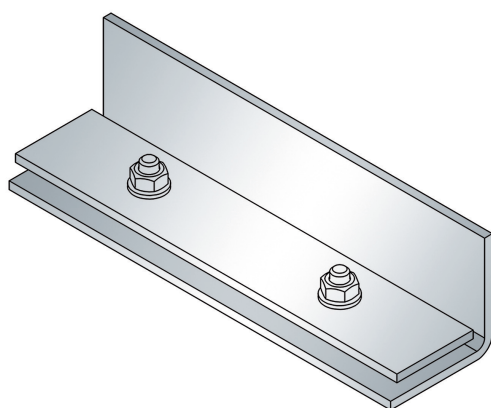


Technical data

Material/sheet thickness: 6 mm
Supply length: 3 mtr

Designs

| Article No. | Height (h) | Recess(WxD) |
|-----------------------------|------------|-------------|
| LFK1/60 | 60 mm | 120 x 20 mm |
| LFK1/80 | 80 mm | 120 x 20 mm |
| LFK1/100 | 100 mm | 120 x 20 mm |
| Special heights on request. | | |

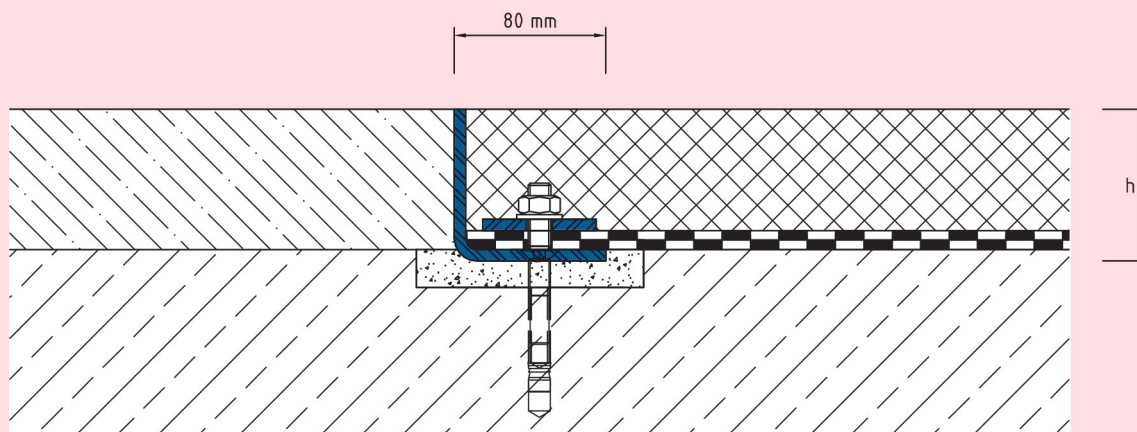

LFK1

Subject to technical change without notice.