

## LFK4/..

- with loose/fixed flange
- covering separation
- edge termination

### FEATURES

high edge protection, professional coating separation

### APPLICATIONS

parking decks, parking garages, underground garages, ramp crossings, pedestrian bridges, all industrial applications, shopping centres, railway stations, airports

### MATERIAL

hot-dip galvanised steel, stainless steel V2A (V4A on request)

### COVERING TYPES

asphalt, concrete, screed

### FORMED PARTS


end piece, corner piece, T-piece, cross piece

### NOTES

Threaded bolt M12x35 mm with washer and nut, e=150 mm

Specification of profile height (h) from the lower edge of the loose flange.

Solid flange joints should be fully welded through and ground flat on the sealing side.

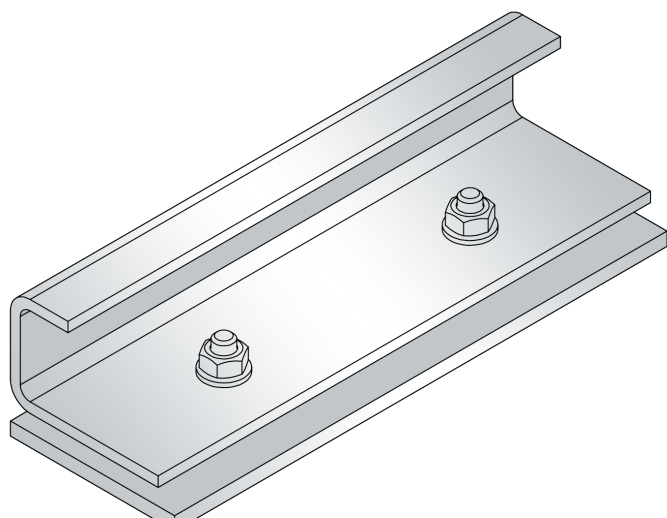


### TECHNICAL DATA

Material thickness fixed flange:	8 mm
Material thickness loose flange:	6 mm
Supply length:	3 mtr

### DESIGNS

ARTICLE NO.	HEIGHT (h)	RECESS (BxT)
LFK4/50	50 mm	120 x 20 mm
LFK4/60	60 mm	120 x 20 mm
LFK4/80	80 mm	120 x 20 mm

Special heights on request.

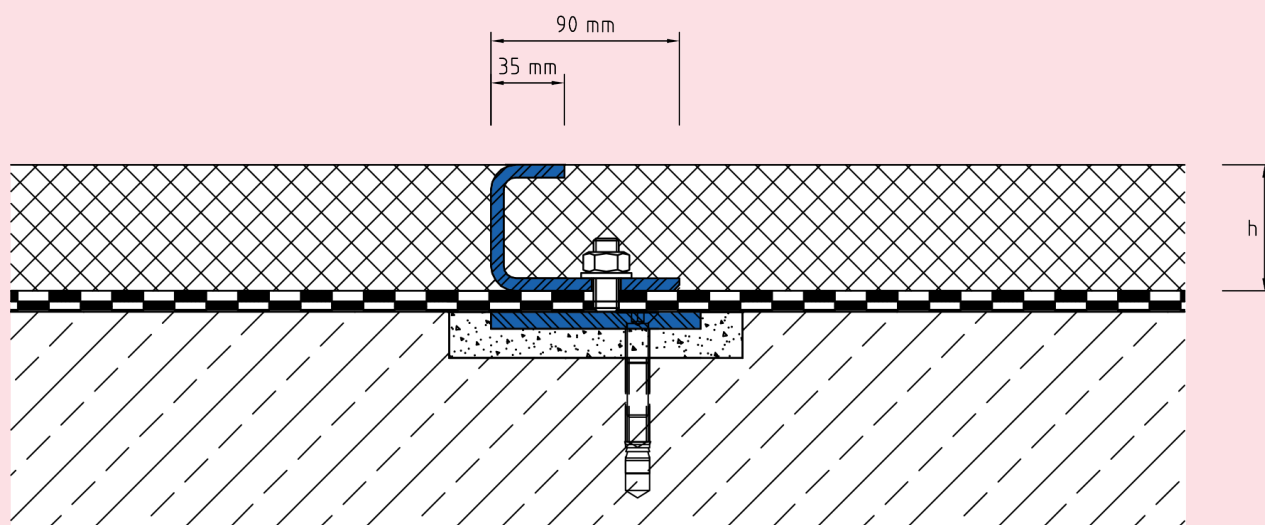

LFK4

Subject to technical change without notice.