




## LFK4/..

- with loose/fixed flange
- covering separation
- edge termination

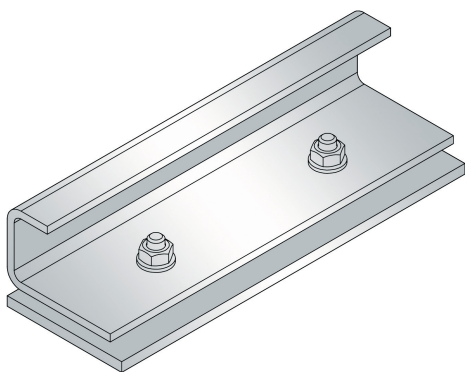

### FEATURES

high edge protection, professional flooring separation

### APPLICATIONS

outdoor, multi-storey and underground park decks, ramp accesses, pedestrian bridges, all industrial applications, shopping centres, railway stations, airports

### MATERIAL

hot-dip galvanised steel, high-grade steel V4A (on request)

### COVERING TYPES

asphalt, concrete, screed

### FORMED PARTS

end piece, corner piece, T piece, cross piece

### NOTES

stud bolt M12x35 mm with lining disc and nut


Indication Profile height (h) from the lower edge of the loose flange  
Solid flange joints should be fully welded through and ground flat on the sealing side.

### Technical data

Material thickness fixed flange: 8 mm  
Material thickness loose flange: 6 mm  
Supply length: 3 mtr

### Designs

Article No.	Height (h)	Recess(WxD)
LFK4/50	50 mm	120 x 20 mm
LFK4/60	60 mm	120 x 20 mm
LFK4/80	80 mm	120 x 20 mm
Special heights on request.		

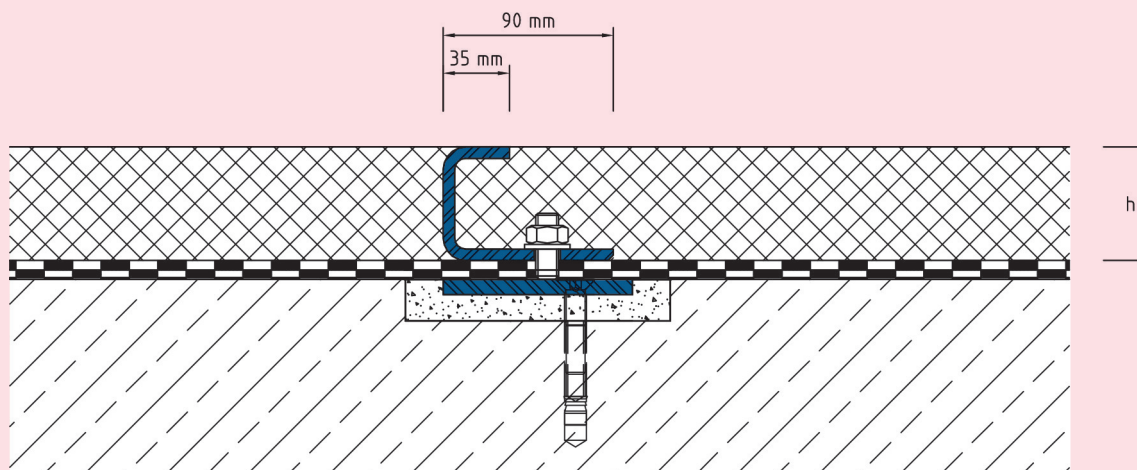

LFK4

Subject to technical change without notice.