



VA.10.230/.. F

- high load-bearing capacity
- visible surface in high-grade steel
- anti-slip surface

FEATURES

watertight, resistant to heavy loads, trafficable by fork-lift trucks, abrasion, weather and temperature resistant (-40°C bis +120°C), resistant to salt and waste-water (alcalics, microbes, bacteria), agreements may also be made for other sealing sections

APPLICATIONS

outdoor, multi-storey and underground park decks, ramp accesses, pedestrian bridges, all industrial applications

MATERIAL

hot-dip galvanised steel substructure and high-grade steel V2A surface, sealing insert made from Wolfin IB

COVERING TYPES

asphalt, screed, natural and stone slabs

TRAFFICABILITY

industrial trucks (lifting trucks, fork-lifts etc.), passenger car, trucks

FORMED PARTS


end piece, membrane upstand, corner piece, T piece, cross piece, transition floor to wall

NOTES

The sealing insert which is looking on the sides of the profile out, has to be connected properly with the sealing system. This is very important to get a watertight result of the joint-profile.

The flanging of the sealing insert with screws M10 at a distance of 150 mm.

This joint profile is also available for a bigger movement. Our engineers and technicians can be of assistance during installation on request.

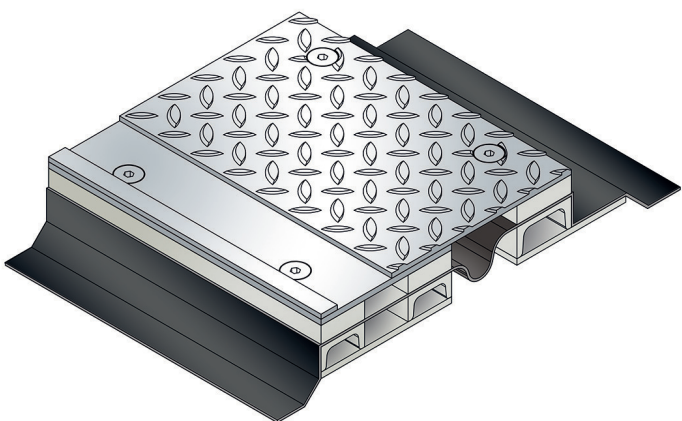


Technical data

Movement horizontal:	100 mm (±50 mm)
Visible width:	230 mm
Maximal joint width:	60 mm
Load rating:	wheel load 4000 kg up to Ø 150 mm, B = 100 mm
Load rating trucks:	600 kN (DIN 1072)
Load rating forklifts:	150 kN (DIN 1055-3)
Supply length:	3 mtr

Designs

Article No.	Height (h)	Recess(WxD)
VA.10.230/52 F	52 mm	1000 x 65 mm
VA.10.230/82 F	82 mm	1000 x 95 mm
Special heights on request.		

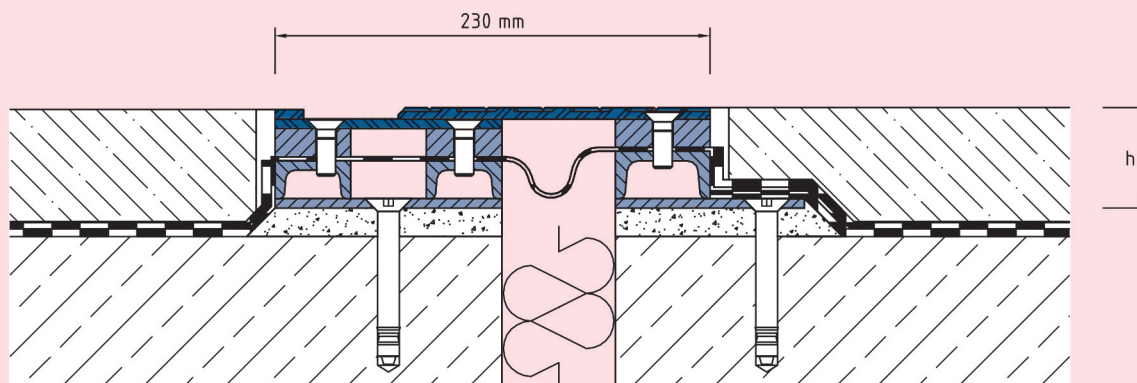

Subject to technical change without notice.