




## VA.1.40/.. G

- replaceable expansion insert
- hygiene-friendly and smooth expansion insert
- non-PVC
- stable aluminum supports
- stainless steel profile edge

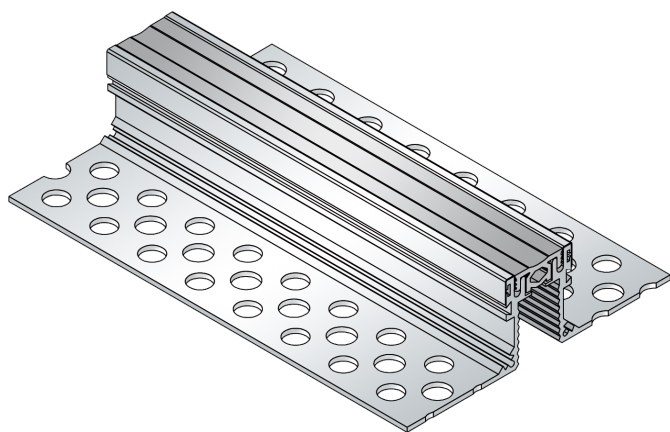

### FEATURES

expansion insert can be replaced anytime, abrasion-, weather- and temperature-resistant (-40°C to +120°C), perforated bearing legs guarantee the best connection to the substrate/covering

### APPLICATIONS

residential, office and administration buildings, hospitals and clean rooms

### MATERIAL

aluminium support with stainless steel profile edge, EPDM expansion insert

### COVERING TYPES

screed, natural and stone slabs

### FORMED PARTS

corner piece, T-piece, cross piece, floor-wall connections

### NOTES

For mastic asphalt, please ask for technical advice.


### TECHNICAL DATA

Movement horizontal:	6 mm ( $\pm 3$ mm)
Movement vertical:	6 mm ( $\pm 3$ mm)
Visible width:	43 mm
Maximal joint width:	30 mm
Load rating:	wheel load 700 kg up to $\varnothing$ 150 mm, B = 100 mm
Supply length:	3 mtr
Color of expansion insert:	grau

### DESIGNS

ARTICLE NO.	PROFILE HEIGHT (h)	RECESS (BxT)
VA.1.40/21 G	21 mm	200 x 31 mm
VA.1.40/34 G	34 mm	200 x 44 mm
VA.1.40/51 G	51 mm	200 x 61 mm
VA.1.40/64 G	64 mm	200 x 74 mm
VA.1.40/84 G	84 mm	200 x 94 mm
VA.1.40/104 G	104 mm	200 x 114 mm
VA.1.40/124 G	124 mm	200 x 134 mm

Special heights on request.

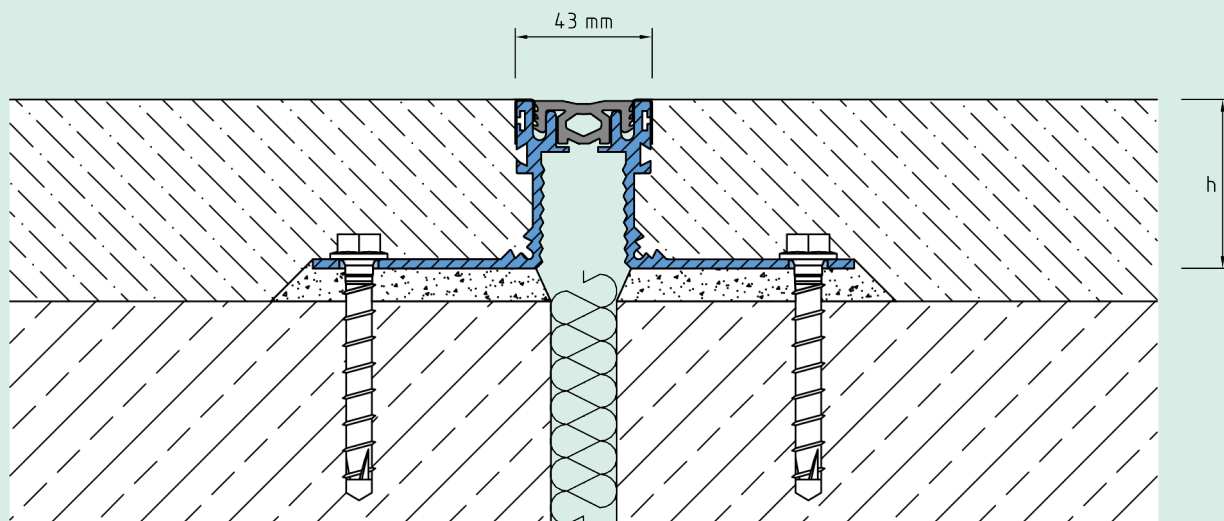

VA.1.40

Subject to technical change without notice.