




VA.1.40/.. G

- replaceable flexible insert
- hygienic, smooth insert
- Non-PVC
- stable aluminium joists
- high-grade steel profile edge

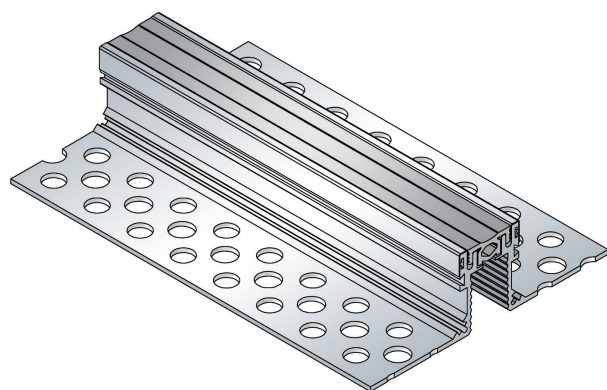

FEATURES

expansion insert can be replaced anytime, abrasion, weather and temperature resistant (-40°C bis +120°C), punched bearing legs guarantee best connection to the subgrade/covering.

APPLICATIONS

residential, office and administration buildings, hospitals and clean rooms

MATERIAL

aluminium joists with edge profile in high-grade steel, synthetic rubber flexible insert (EPDM)

COVERING TYPES

screed, natural and stone slabs

FORMED PARTS

corner piece, T piece, cross piece, transition floor to wall

NOTES


In case of mastic asphalt, please request a technical consultation.

Technical data

Movement horizontal:	6 mm (±3 mm)
Movement vertical:	6 mm (±3 mm)
Visible width:	43 mm
Maximal joint width:	30 mm
Load rating:	wheel load 700 kg up to Ø 150 mm, B = 100 mm
Supply length:	3 mtr
Color of flexible insert:	grey

Designs

Article No.	Profile height (h)	Recess(WxD)
VA.1.40/21 G	21 mm	200 x 31 mm
VA.1.40/34 G	34 mm	200 x 44 mm
VA.1.40/51 G	51 mm	200 x 61 mm
VA.1.40/64 G	64 mm	200 x 74 mm
VA.1.40/84 G	84 mm	200 x 94 mm
VA.1.40/104 G	104 mm	200 x 114 mm
VA.1.40/124 G	124 mm	200 x 134 mm
Special heights on request.		

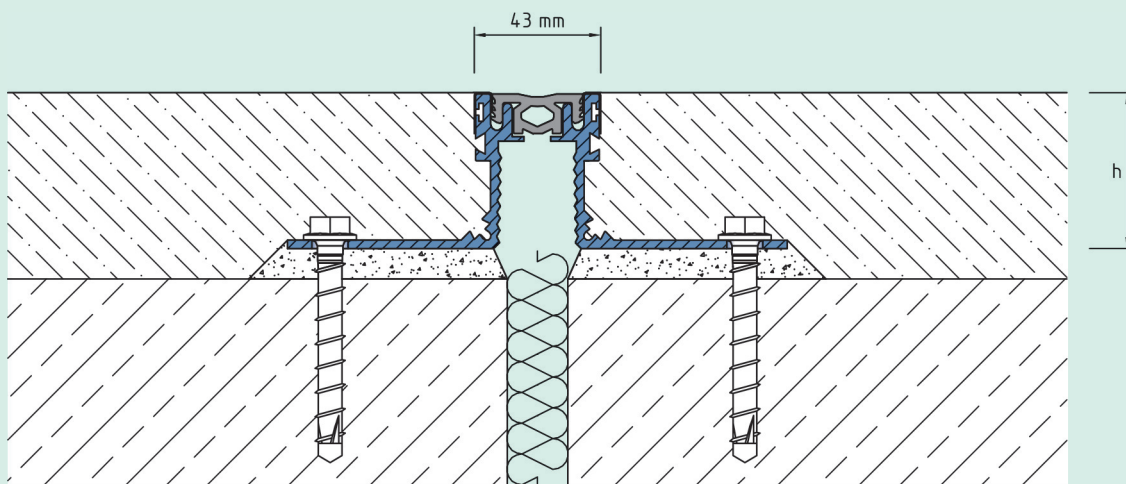

VA.1.40

Subject to technical change without notice.