




VA.9.108/.. F

- **high load-bearing capacity**
- **vibration-free trafficability**
- **visible surface in high-grade steel**

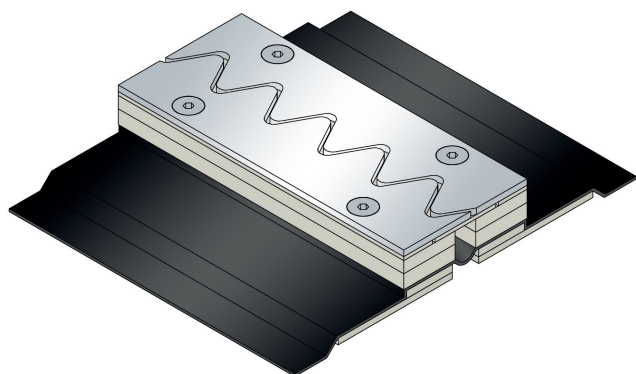

FEATURES

watertight, resistant to heavy loads, trafficable by fork-lift trucks, abrasion, weather and temperature resistant (-40°C bis +120°C), resistant to salt and waste-water (alcalics, microbes, bacteria), agreements may also be made for other sealing sections

APPLICATIONS

outdoor, multi-storey and underground park decks, ramp accesses, pedestrian bridges, all industrial applications

MATERIAL

hot-dip galvanised steel substructure and high-grade steel V2A surface, sealing insert made from Wolfin IB

COVERING TYPES

asphalt, screed

TRAFFICABILITY

industrial trucks (lifting trucks, fork-lifts etc.), passenger car, trucks

FORMED PARTS

upstand, membrane upstand, corner piece, T piece, cross piece, transition floor to wall

NOTES

The flanging of the sealing insert is made with M10 at a distance of 150 mm.

The sealing insert wich is looking on the sides of the profile out, has to be connected properly with the sealing system. This is very important to get a watertight result of the joint-profile.


Our engineers and technicians can be of assistance during installation on request.

Technical data

Movement horizontal:	15 mm (-5/+10 mm)
Visible width:	108 mm
Maximal joint width:	50 mm
Load rating:	wheel load 5000 kg up to Ø 150 mm, B = 100 mm
Load rating trucks:	600 kN (DIN 1072)
Load rating forklifts:	150 kN (DIN 1055-3)
Supply length:	3 mtr

Designs

Article No.	Profile height (h)	Recess(WxD)
VA.9.108/43 F	43 mm	1000 x 53 mm
VA.9.108/57 F	57 mm	1000 x 67 mm
VA.9.108/72 F	72 mm	1000 x 82 mm
VA.9.108/87 F	87 mm	1000 x 97 mm
VA.9.108/102 F	102 mm	1000 x 112 mm
VA.9.108/117 F	117 mm	1000 x 127 mm
VA.9.108/130 F	130 mm	1000 x 140 mm
Special heights on request.		

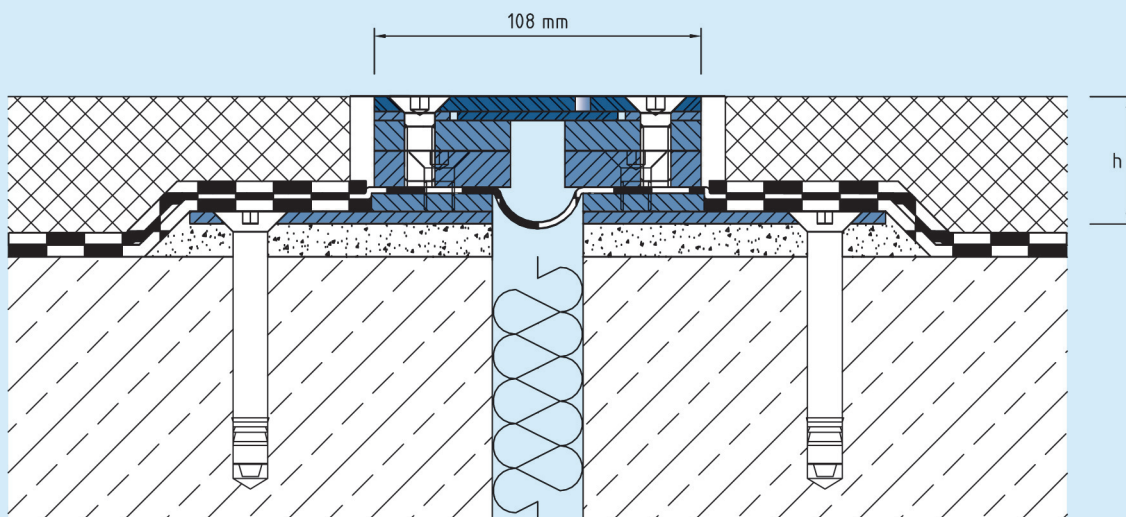

VA.9.108

Subject to technical change without notice.